

Fig. 22-1


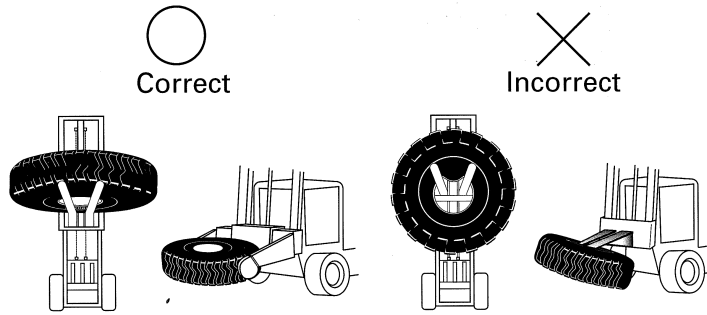


Fig. 22-2

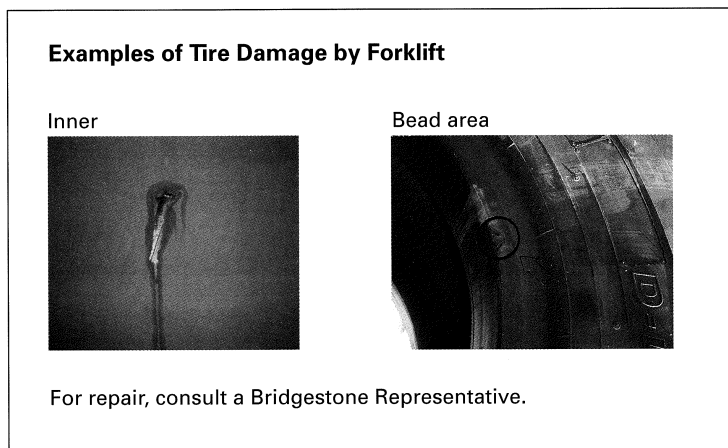

Handling of Rims

- (1) Keep rims free from rust. If rusted, take off the rust with wire brushes.
- (2) Handle rims carefully to avoid scratching the beads and distorting rim flanges.
- (3) Do not place a lever or equivalent in the valve holes to lift rims.

Handling O-rings

- (1) O-rings should be stored in a cool, dry place.
- (2) Use a new O-ring whenever a tire is mounted on a rim.




Fig 23.
Handling of tire with nylon sling